


Performance Bulletin

Test Date: 26th February 2016



Performance Data

RPM	Ave Km/h	Ave L/h	Ave Km/L
1000	5.90	1.25	4.72
1500	8.20	2.20	3.73
2000	10.35	3.80	2.72
2500	11.90	5.60	2.13
3000	17.55	7.65	2.29
3500	27.25	9.00	3.03
4000	33.75	10.05	3.36
4500	38.95	13.05	2.98
5000	44.75	16.70	2.68
5500	49.90	20.25	2.46
6000	56.15	22.50	2.50

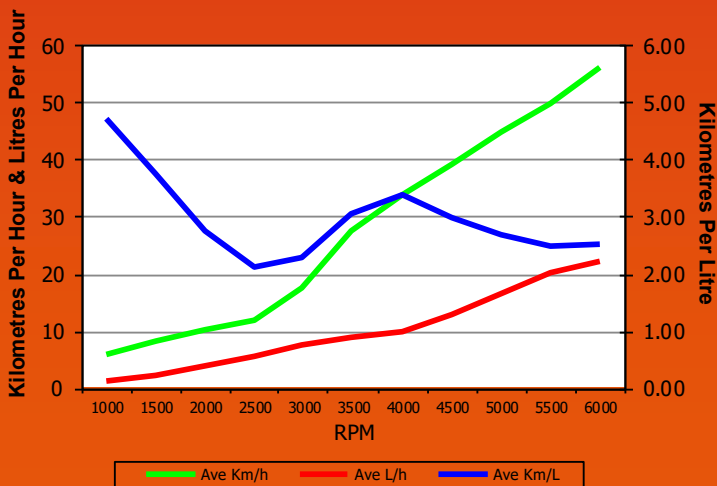

Test Performed by certified Yamaha Technicians

Boat Manufactured by:

<http://www.stessco.com.au/>

STESSCO RENEGADE 480

Length (LOA)	5.20M
Beam	2.20M
Dry Weight	458KGS
Max Hp	75HP
Fuel Capacity	60L
Weight as Tested (approximate)	807KGS

F70LA

Horsepower	51.5kW (70ps) @ 5800rpm
Engine Type	16-Valve SOHC, In-Line 4
Weight	119kg
Gear Ratio	2.33 (28/12)
Mounting Height	# 2 Hole

PROPELLER

Series	K Series Alloy
Diameter/ Pitch	13½ x 15"
Part Number	6E5-45947-00

TEST CONDITIONS

Crew	2
Air Temperature	26.5°C
Wind Speed	<5 Knots
Fuel	80L
Conditions	Flat—Fresh Water

TEST PERFORMANCE SUMMARY

Max Ave Speed	56.15Km/h or 30.26Knots
Best Cruising Km/L	3.36Km/L @ 4000rpm
Range, Based on 95% Fuel Capacity at Best Km/L	255 Kilometres
0 - 40 Km/h	8.28 Seconds (52.98M)

Data may vary due to changes in weather, tides, boat load, hull & propeller conditions, temperature, atmospheric pressure and wind direction. Fuel data gathered with a non-calibrated Yamaha fuel gauge. Speed data recorded with GPS receiver.

Yamaha Motor Australia accepts no responsibility for the accuracy of these readings. All test data is recorded with the engine fully trimmed in (-4), until 5500 RPM, where possible.