



# Yamaha Performance Bulletin


*Anglapro Sniper 444 Pro - Powered by Yamaha F60*



| Performance Summary                           |                              | Test Date: 16 Oct 2020 |
|---|------------------------------|------------------------|
| Max. Ave Speed                                | 59.75 Km/h or 32.20525 Knots |                        |
| Best Cruising Km/L                            | 36.40 Km/L @ 4000 RPM        |                        |
| Range based on 95% Fuel Capacity at Best Km/L | 228 Kilometres               |                        |
| 0 - 40 Km/h                                   | 7.63 Seconds (47.23m)        |                        |

## Performance Data

| RPM  | Ave Km/h | Ave L/h | Ave Km/L |
|------|----------|---------|----------|
| 1000 | 5.20     | 1.45    | 3.59     |
| 1500 | 7.35     | 2.40    | 3.06     |
| 2000 | 9.45     | 3.70    | 2.55     |
| 2500 | 11.60    | 5.20    | 2.23     |
| 3000 | 13.65    | 7.00    | 1.95     |
| 3500 | 29.15    | 7.75    | 3.76     |
| 4000 | 36.40    | 9.10    | 4.00     |
| 4500 | 43.40    | 11.35   | 3.82     |
| 5000 | 49.25    | 14.05   | 3.51     |
| 5500 | 55.00    | 17.55   | 3.13     |
| 6000 | 59.75    | 21.25   | 2.81     |

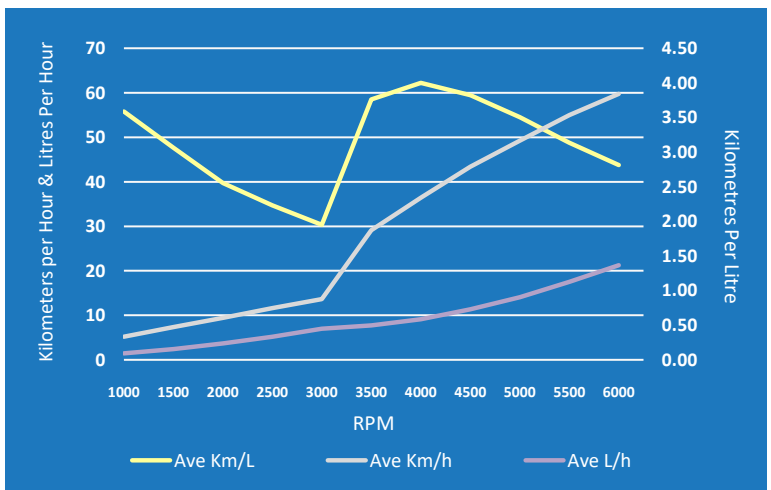

## Boat Specifications

|                           |        |
|---------------------------|--------|
| Length (LOA)              | 4.50 m |
| Width (Beam)              | 2.08 m |
| Dry Weight                | 380 kg |
| Max HP                    | 60 hp  |
| Fuel Capacity             | 60 L   |
| Weight as Tested (approx) | 718 kg |

## Outboard Specifications

|                 |                          |
|-----------------|--------------------------|
| Model           | F60LB                    |
| Displacement    | 996 cc                   |
| Engine Type     | 16-Valve SOHC, In-Line 4 |
| Weight          | 113 kg                   |
| Gear Ratio      | 1.85:1 (24/13)           |
| Mounting Height | # 2                      |

## Prop Specifications

|                  |                       |
|------------------|-----------------------|
| Series           | Enduro G Series Alloy |
| Diameter / Pitch | 11 1/8 x 13"          |
| Part Number      | 69W-45945-00          |

## Test Conditions

|                  |          |
|------------------|----------|
| Crew             | 2        |
| Air Temperatures | 27.4 °C  |
| Wind Speed       | <5 Knots |
| Fuel             | 35 L     |
| Conditions       | Flat     |

The information and data contained in this Performance Bulletin is approximate and subject to many different factors and variables. It is provided as a guideline only and your boat's performance may be different than the information contained in this Performance Bulletin due to various factors, including your boat's actual weight, wind and water conditions, temperature, humidity, elevation, bottom paint, boat options affecting wind/water drag and/or boat weight, and operator ability. Yamaha reserves the right to change the specifications and performance data of this Performance Bulletin or engine without notice. This document contains many of Yamaha's valuable trademarks. It may also contain trademarks belonging to other companies. Any references to other companies or their products are for identification purposes only, and are not intended to be an endorsement.